


Cennik skraplaczy powietrznych typu S8 przeznaczonych do freonowych instalacji chłodniczych

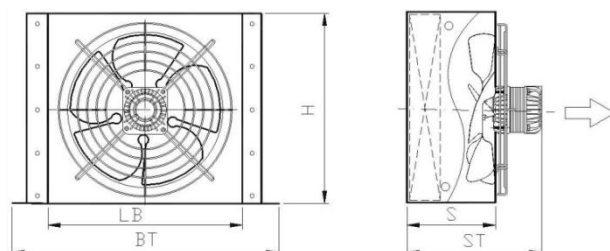

L.p	Typ skraplacza	Powierzchnia [m ²]	Wydajność dla R-404A [W]	Ilość went.-wydatek [szt] - [m ³ /h]	Wymiary [mm]				Cena netto wer. ocynkowana [EUR]	Cena netto wer. malowana [EUR]
					BT	LB	H	ST - S		
1	S8-1172	1,11	605	1-290	243	190	203	173-110	132	147
2	S8-1173	1,67	797	1-250	243	190	203	193-130	158	177
3	S8-1174	2,23	928	1-230	243	190	203	218-155	178	201
4	S8-2172	2,35	1277	2-560	453	400	203	173-110	198	222
5	S8-2173	3,52	1659	2-500	453	400	203	193-130	224	250
6	S8-2174	4,69	1938	2-480	453	400	203	218-155	252	298
7	S8-1202	1,45	868	1-440	273	220	228	177-110	150	168
8	S8-1203	2,18	1178	1-400	273	220	228	197-130	184	207
9	S8-1204	2,9	1385	1-370	273	220	228	222-155	198	222
10	S8-2202	3,03	1812	2-880	513	460	228	177-110	218	244
11	S8-2203	4,55	2372	2-800	513	460	228	197-130	250	282
12	S8-2204	6,07	2712	2-750	513	460	228	222-155	282	316
13	S8-1232	1,83	1267	1-750	303	250	253	183-110	165	181
14	S8-1233	2,75	1744	1-690	303	250	253	203-130	192	216
15	S8-1234	3,66	2072	1-640	303	250	253	228-155	220	247
16	S8-2232	3,81	2559	2-1500	573	520	253	183-110	243	273
17	S8-2233	5,72	3302	2-1380	573	520	253	203-130	282	316
18	S8-2234	7,62	4184	2-1300	573	520	253	228-155	355	399
19	S8-1252	2,25	1655	1-800	333	280	278	186-110	188	210
20	S8-1253	3,39	2007	1-740	333	280	278	206-130	216	243
21	S8-1254	4,51	2365	1-700	333	280	278	231-155	244	274
22	S8-2252	4,67	3305	2-1580	633	580	278	186-110	308	345
23	S8-2253	7,01	4007	2-1480	633	580	278	206-130	352	396
24	S8-2254	9,35	4706	2-1380	633	580	278	231-155	398	445
25	S8-1302	3,59	2367	1-1300	403	350	353	253-130	217	244
26	S8-1303	5,39	3060	1-1200	403	350	353	273-150	260	291
27	S8-1304	7,18	3767	1-1100	403	350	353	298-175	352	396
28	S8-2302	7,39	4703	2-2600	773	720	353	253-130	372	417
29	S8-2303	11,08	6156	2-2400	773	720	353	273-150	435	487
30	S8-2304	14,77	6971	2-2280	773	720	353	298-175	500	559